

LASER CINQUE

La speciale formula dei segmenti di questo disco diamantato dà la possibilità all'utente professionale di poter tagliare oltre a tutti i materiali edili, anche materiali come ferro, ghisa, lamiera e tanti altri, facendo della versatilità d'utilizzo la principale qualità di questo prodotto. L'ottima resa è assicurata dall'altezza di 8 mm dei segmenti diamantati.

The special design of the segments of this diamond blade gives the professional user the possibility of cutting not only all building materials but also iron, cast iron, sheet metal and many others, making versatility the primary quality of this product. An excellent performance is guaranteed by the 8 mm height of the diamond segments.

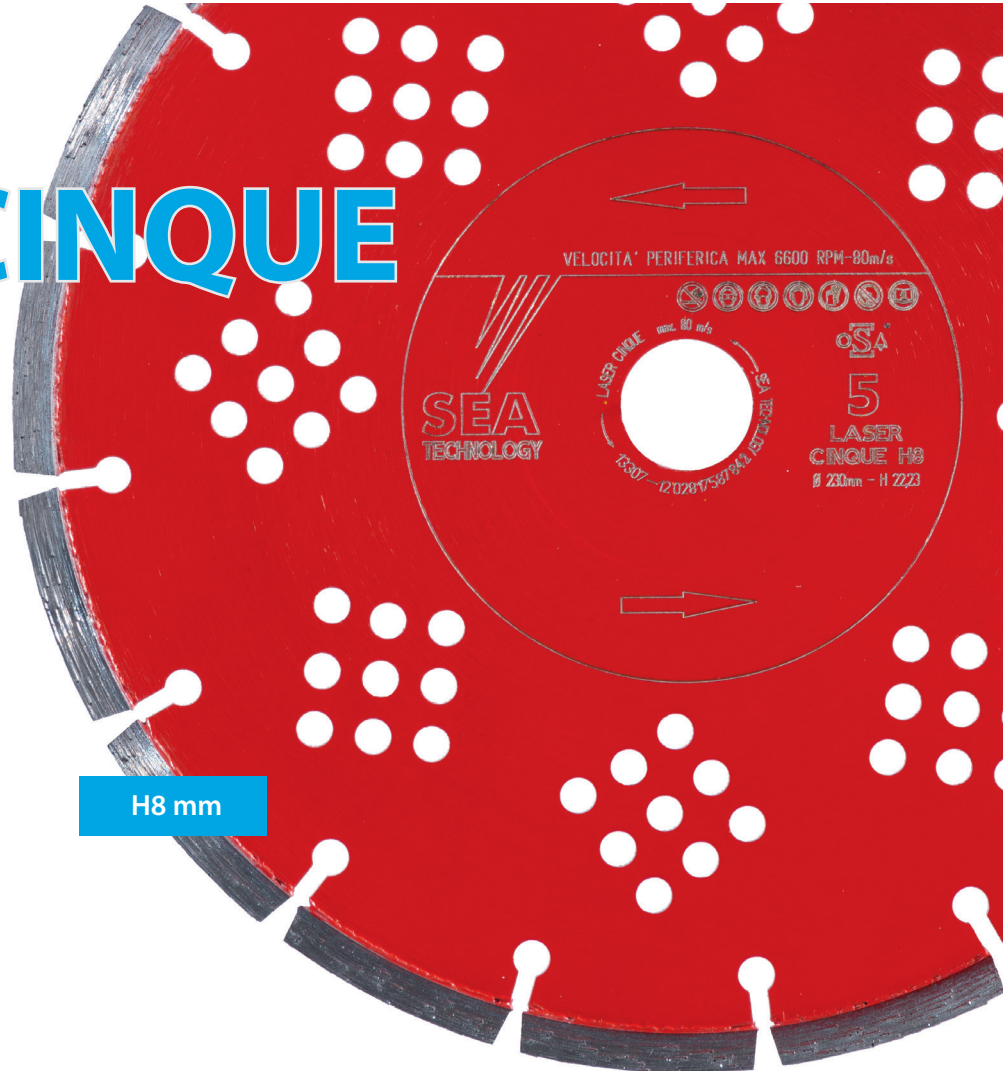


TABELLA TECNICA Technical Spec

calcestruzzo armato, graniti, porfidi, pietre naturali
reinforced concrete, granites, porphyries, natural stones



cemento stagionato, laterizi, tegole, arenaria, piastre ghiaino
concrete, bricks, roof tiles, sandstone, aggregated concrete



OTTIMO

refrattari, ferro, ghisa, legno
refractory bricks, steal, cast iron, wood



BUONO

barre rotaie, putrelle, profilati, pav. galleg.
rails bar, metal beams, profiles, floating floor



MEDIO

gres porcellanato, klinker, monocottura, marmi, legno (meno di 2 cm)
porcelain tiles, klinker, single fired tiles, marble, wood (less than 2 cm)



SUFFICIENTE

bicottura, cemento fresco, asfalto, alluminio, plastica, vetro, acciaio, legno (più di 2 cm)
double fired tiles, green concrete, asphalt, aluminium, plastic, glass, steel, wood (more than 2 cm)

INADATTO

COD.	Ø	FORO Bore	SPESSORE Thickness	ALTEZZA Height
L5115SF	115	22,22	2,4	8
L5230SF	230	22,23	2,4	8
L5300F25	300	25,40	2,8	8
L5350F25	350	25,40	2,8	8
L5400F25	400	25,40	2,8	8
L5450F25	450	25,40	2,8	8